

Warning lightbars series VxT, VxTC - height 60 or 80 mm

public safety equipment



Properties

- unique design offers variability of lightbar equipment and versions
- easy installation and maintenance - lightbar is designed with high requirements to used materials and weather resistance
- crash-resistant polycarbonate UV stabilised lenses
- low aerodynamic resistance
- homologation:
 - EHK 65 - DAY / NIGHT operation - blue (TB2), red (TR2) and amber color (TA2)
 - EHK 10



Dimensions

- height 80 mm - VxT / 80 or 60 mm - VxT / 60
- depth 288 mm
- standard width 1089, 1229, 1528, 1708 mm
- special width 492, 589, 989, 1409, 1908 mm



Basic lightbar configuration

- corners modules U-shaped - LEDs (dual or single row LED optics)
- colored or clear lenses
- center lens in clear, black, red, blue, amber or opal color



VNT 012(024) LU - FD



VNT 012(024) LU - HD

Equipment options

- LED single (STOP, STOP/POLICIE, AMBULANCE), or programmable warning displays (for height 80 mm only)
- integrated pressure loudspeaker in lightbar (only VxT/80, from length 589)
- integrated SES module - synchronization of external lamps (mpower, WR, etc.)
- possibility of automatic dimming of DIM
- integrated electronic siren in the lightbar (only VxT/80)
- side alley lights
- inner directional warning LED modules
- inner white LED work lights
- LED arrowbar in center section (dual or single row optics)
- dual row LED optics
 - FD - LED MODULE consists of 6 LEDs into the „rectangle” 
 - HD - LED MODULE consists of 3 LEDs into the „triangle” (only VxT/80) 
- two lightbars in one - allows any combination of two color LEDs on each side under clear end lenses such as red + blue, blue + amber



VNT 012LU/60-BbwbCbwbB-TM62-AT-1089



VNT 012 LU/60-BbwbCbwbB-1089

Configuration example



VST 012LU-HD/80-BbbSbbB-2S-VS150 1089

- lightbar VxT
- 12 V
- corner modul in blue color
- inner directional warning LED modules in blue color
- 2 displays „STOP” - back and forward
- searching work light VS 150
- dual row LED optics - HD
- length 1089 mm, height 80mm



VNT 012LUHD/80-BbbSbbB 1089

- lightbar VxT
- 12 V
- corner modul in blue color
- inner directional warning LED modules in blue color
- integrated loudspeakers
- dual row LED optics - HD
- length 1089 mm, height 80mm



VNTC 024 LU-FD/80-BAaababaOababaaAB 1708

- lightbar VxT
- 24 V
- corner modul in blue/amber color
- inner directional warning LED modules in blue/amber color
- center lens in opal color
- dual row LED optics - FD
- length 1708 mm, height 80 mm


LED lightbar „SLE”

VxT(C) 012(024) LU-(x)-(4M)-SLE



- lightbar SLE: lenght 492 mm, height 60 mm
- color: amber, blue, red/blue
- lens: amber, blue, red, clear
- fixed mount or magnetic (with safety cable and cigarette plug)

- lightbar SLE: lenght 589 mm, height 80 mm
- integrated louspeaker and electronic siren without microphone function
- color: blue, red/blue
- lens: blue, red, clear
- fixed mount or magnetic (with safety cable and cigarette plug)

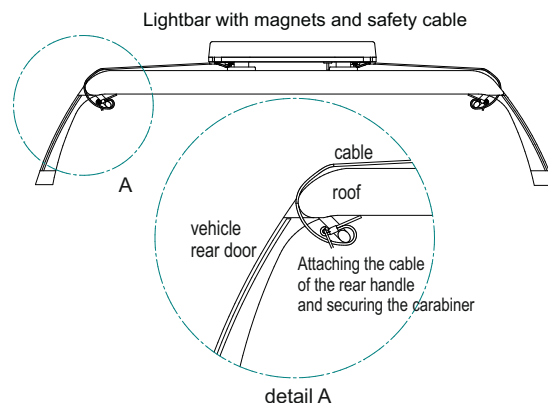

HOLOMÝ s.r.o.

Hemy 829, Krásno nad Bečvou
757 01 Valašské Meziříčí
Česká republika

tel: +420 571 685 970
+420 571 685 971

e-mail: sales@holomy.cz
www.holomy.cz

Certifikát ISO 9001